


## SFF-50-1.5-2

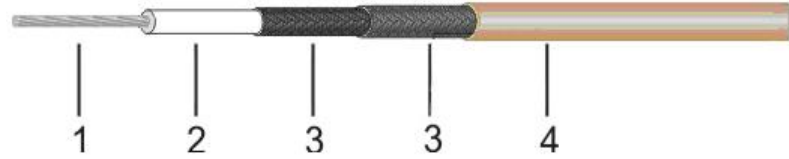

### 结构参数 Construction Specification

	材料 Material	直径 Diameter(mm)
1. 内导体 Inner Conductor	镀银铜包钢线 Silver Plated Copper Clad Steel	7×0.18
2. 绝缘体 Dielectric	聚四氟乙烯 PTFE	1.50
3. 外导体 Outer Conductor	双层镀银线编织 Double Silver Plated Copper Braid	2.70
4. 护套 Jacket	聚全氟乙丙烯 FEP	3.20

### 电性能参数 Electrical Characteristics

阻抗 Impedance(Ohm)	50
电容 Capacitance(pF/m)	96
速率 Velocity(%)	70
弯曲半径 Bending Radius(mm)	16
最大工作电压 Max. Oper. Voltage(VMS)	1000
最大工作频率 Max. Oper. Frequency (MHz)	3000
温度范围 Operating Temp. (°C)	-55—+200

### 衰减 Attenuation(Typical)

频率 Frequency(MHz)	衰减 Attenuation(dB/m)
30	0.19
200	0.50
3000	2.00