


RG 180

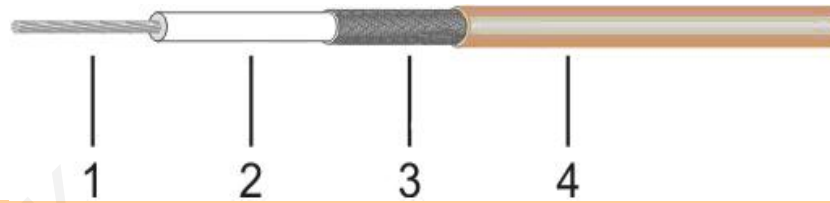

Construction Specification		
	Material	Diameter(mm)
1. Inner Conductor	Silver Plated Copper Clad Steel	7×0.102
2. Dielectric	PTFE	2.59
3. Outer Conductor	Silver Plated Copper Braid	3.00
4. Jacket	FEP	3.56

Electrical Characteristics	
Impedance(Ohm)	95
Capacitance(pF/m)	51
Velocity(%)	70
Bending Radius(mm)	15
Max.Oper. Voltage(VMS)	1500
Max.Oper. Frequency (MHz)	400
Operating Temp. (°C)	-55~+200

Attenuation(Typical)	
Frequency(MHz)	Attenuation(dB/m)
100	0.207
400	0.420
1000	0.676