


RG 178 FEP

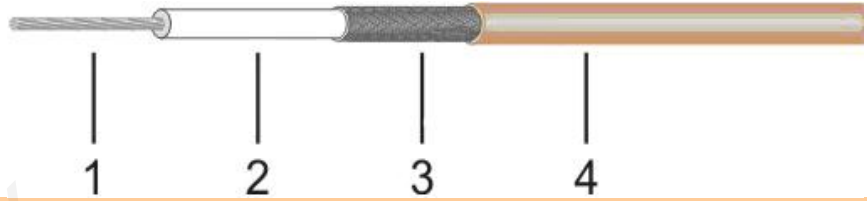

Construction Specification		
	Material	Diameter(mm)
1. Inner Conductor	Silver Plated Copper	7×0.102
2. Dielectric	FEP	0.86
3. Outer Conductor	Silver Plated Copper Braid	1.30
4. Jacket	FEP	1.83

Electrical Characteristics	
Impedance(Ohm)	50
Capacitance(pF/m)	96
Velocity(%)	70
Bending Radius(mm)	10
Max.Oper. Voltage(VMS)	1000
Max.Oper. Frequency (MHz)	3000
Operating Temp. (°C)	-55~+150

Attenuation(Typical)	
Frequency(MHz)	Attenuation(dB/m)
100	0.453
400	0.912
1000	1.460
3000	2.650