


RG 302

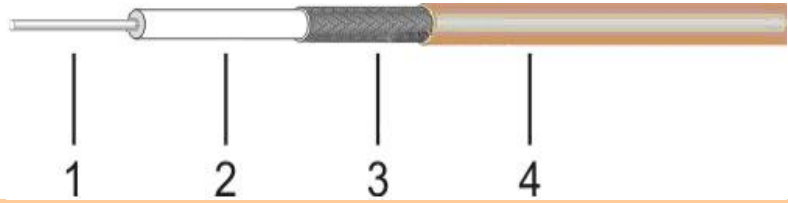

Construction Specification

	Material	Diameter(mm)
1. Inner Conductor	Silver Plated Copper Clad Steel	0.64
2. Dielectric	PTFE	3.71
3. Outer Conductor	Silver Plated Copper Braid	4.21
4. Jacket	FEP	5.13

Electrical Characteristics

Impedance(Ohm)	75
Capacitance(pF/m)	64
Velocity(%)	70
Bending Radius(mm)	25
Max.Oper. Voltage(VMS)	2300
Max.Oper. Frequency (MHz)	3000
Operating Temp. (°C)	-55~+200

Attenuation(Typical)

Frequency(MHz)	Attenuation(dB/m)
100	0.105
400	0.217
1000	0.354
3000	0.666